


ALLIANCE

Specification Sheet

Model: CGBL01 (MR16 Bullet Light)

Fixture Length: 8 in. (20.32 cm)
 Fixture Height: 8.25 in. (21.0 cm)
 Base Height: 3 in. (7.62 cm)
 Width: 2.75 in. (6.98 cm)

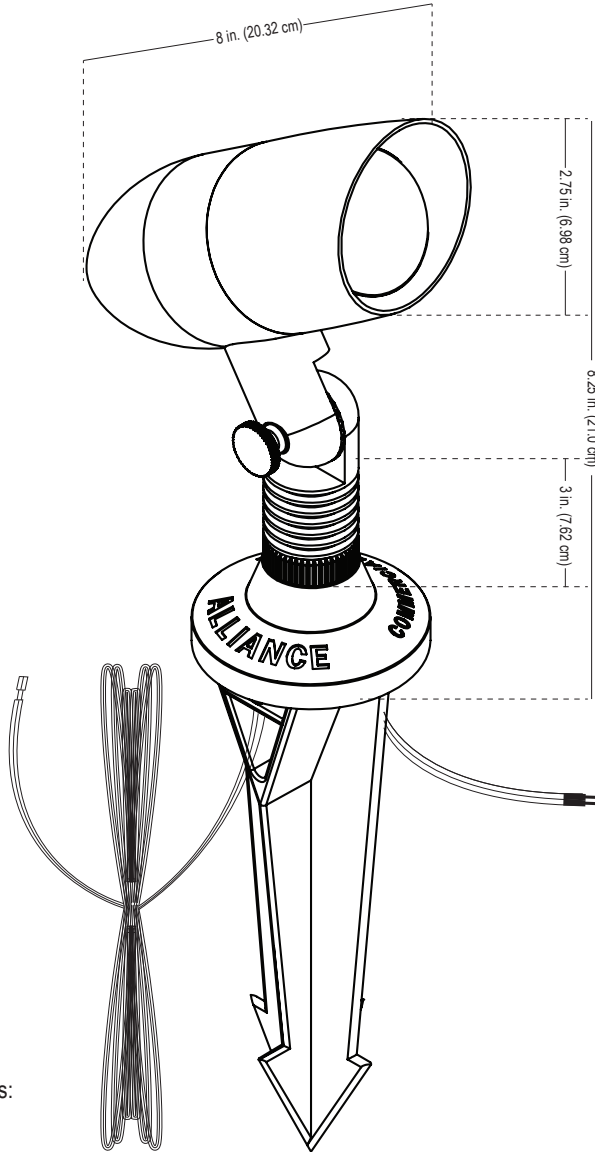

Notes:

Project:
Type:

Specifications and Features:

- Body:** Solid brass with an aged brass finish
- Knuckle:** Solid brass with dial adjustment for easy adjustments
- Shroud:** Brass with a clear glass convex lens, with turn and lock fitting
- Socket:** Spring loaded ceramic bi-pin socket with dual contact and lamp clips
- Wire:** Industry first double wire lead, 16 awg (UL listed), brown. Includes a 25' lead, pre-connected to the fixture and an 18" lead, pre-stripped for easy wire connection.
- Stake:** Plastic ground stake, attached to the fixture (8.5 in; 21.6 cm length) with a commercial grade brass stake collar
- Warranty:** Lifetime warranty on fixture housing
- Certification:** UL Listed to U.S. and Canadian safety standards for low voltage landscape luminaires (UL 1838)



Lamp Options

Model #	Base Type	Angle	Wattage	Lumen Output
LMR16-LED-4W-NS	MR16	15°	4w	250lm
LMR16-LED-4W-F	MR16	45°	4w	250lm
LMR16-LED-4W-WF	MR16	60°	4w	250lm
LMR16-LED-5W-NS	MR16	15°	5w	310lm
LMR16-LED-5W-F	MR16	45°	5w	310lm
LMR16-LED-5W-WF	MR16	60°	5w	310lm
LMR16-20-36 (Halogen)	MR16	45°	35w	310lm

LED Ordering Guide: Model-Lamp Wattage-Lamp Angle
 Example: CGBL01-LED-5W-F

Accessories Available:

Mounting Accessories:	MR16 Accessories:
RISER6 - 6" brass riser, aged brass finish	Linear Lens
RISER12 - 12" brass riser, aged brass finish	Frosted Lens
RISER18 - 18" brass riser, aged brass finish	Spread Lens
RISERADJ - Adjustable plastic riser, aged brass cap	Blue Lens
RMB - Round Mounting Base	Hex Louver
GUTTERMOUNT	