


# ALLIANCE

## Specification Sheet

### Model: PL250 (Path Light)

Fixture Height: 17-27 in. (43.0-69.0 cm)  
 Stem Diameter: 1.6 in. (4.1 cm)  
 Hat Diameter: 4 in. (10.16 cm)

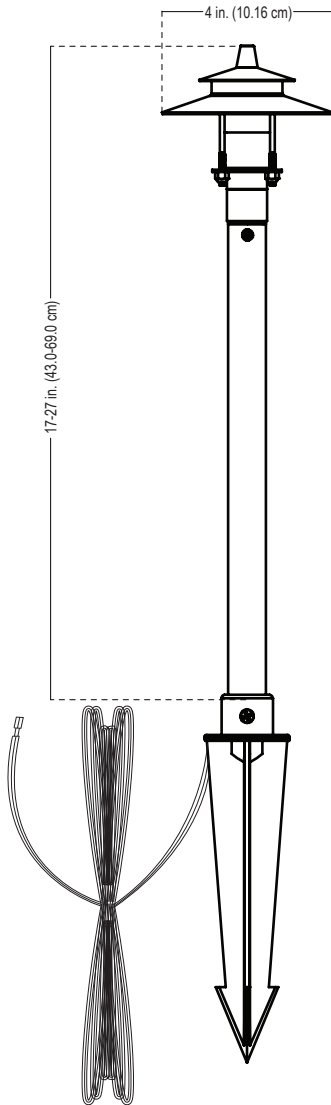

Notes:

Project:
Type:

#### Specifications and Features:

**Stem:** Adjustable brass stem, 17"-27" length, aged brass finish

**Hat:** Solid brass area light hat

**Socket:** Spring loaded ceramic bi-pin socket with dual contact

**Lens:** Clear glass lens

**Wire:** 25' Foot wire lead, 16 awg (UL listed), brown, Pre-connected to the fixture, Pre-stripped for easy wire connection

**Stake:** Solid brass stake, attached to the fixture with a set screw (8.5 in; 21.6 cm length)

**Warranty:** Lifetime warranty on fixture housing

**Certifications:** Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL and cETL Listed Mark.



#### Lamp Options


Model #	Base Type	Wattage	Lumen Output
LBIPIN-LED-3W	Bipin/G4	3w	150lm
LXELOGEN-20 (Halogen)	Bipin/G4	20w	150lm

LED Ordering Guide: Model-LED

Example: PL250-LED

Project:
Type:

### Model: LBIPIN-LED-3W (3 watt BIPIN LED)

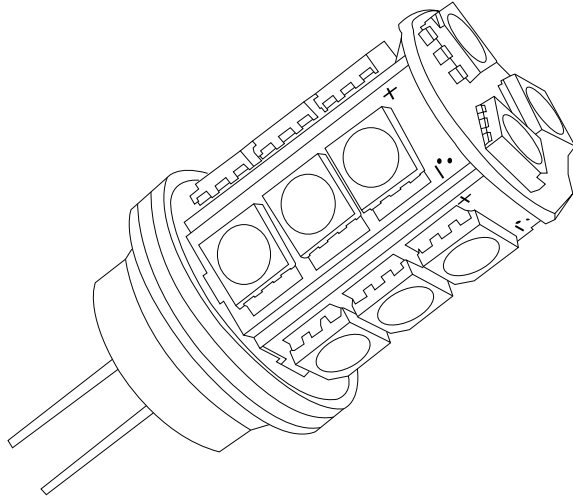

**Specifications and Features:**

- Watts:** 3
- Base Type:** G4/BiPin
- Light Output:** 150 lumens
- Color:** Warm White
- Color Temperatures:** 2700K
- Operating Voltage:** 8-24v
- CRI:** Ra>80
- LED Chip Qty:** 18 Pieces
- Halogen Equivalent:** 20w
- Rated Hours:** 50,000 hrs
- Ambient Operating Temperature:** <72°C
- Transformer Compatibility:** Must be powered by magnetic transformer
- Warranty:** Five year limited warranty on LED components

Lamp Color Options

Model #	Color	Color Temp.	Base Type	Wattage	Lumen Output
LBIPINLED-3W-3K	Bright White	3000K	BIPIN/G4	3w	150lm
LBIPIN-LED-3W-AMBER*	Amber	Amber	BIPIN/G4	3w	150lm

\*Turtle Safe

Notes: