


# ALLIANCE

## Specification Sheet

### Model: CAL255 (Copper Area Light)

Fixture Height: 20.5-21.5 in. (52.07-54.61 cm)  
 Hat Width: 6.25 in. (15.87 cm)

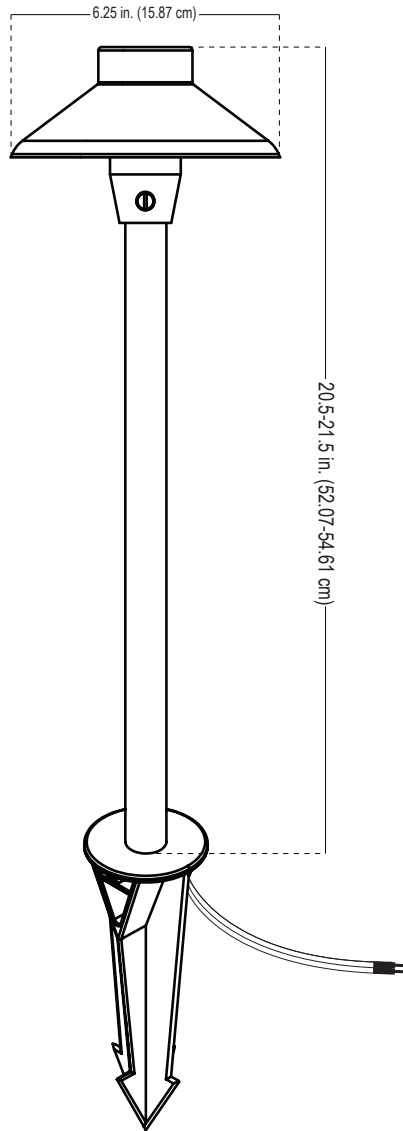

Notes:

Project:
Type:

#### Specifications and Features:

- Hat:** Copper area light hat, natural copper finish
- Stem:** Copper area light stem, natural copper finish
- Collar:** Adjustable collar with thumb screw, natural brass
- Socket:** Spring loaded ceramic bi-pin socket with dual contact
- Wire:** 18 inch wire lead, 16 awg (UL listed), brown, Pre-connected to the fixture, Pre-stripped for easy wire connection
- Stake:** Plastic ground stake, attached to the fixture (8.5 in; 21.6 cm length)
- Warranty:** Lifetime warranty on fixture housing
- Certifications:** Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL and cETL Listed Mark.



#### Lamp Options

Model #	Base Type	Wattage	Lumen Output
LBIPIN-LED-3W	BIPIN/G4	3w	150lm
LXELOGEN-20 (Halogen)	BIPIN/G4	20w	150lm


LED Ordering Guide: Model-LED

Example: CAL255-LED

Project:

Type:

### Model: LBIPIN-LED-3W (3 watt BIPIN LED)

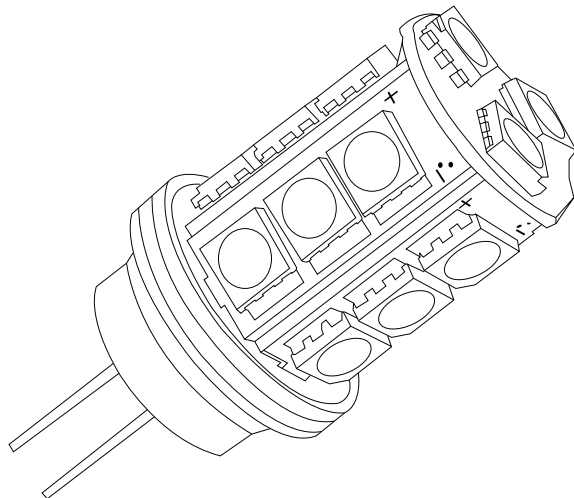

#### Specifications and Features:

**Watts:** 3

**Base Type:** G4/BiPin

**Light Output:** 150 lumens

**Color:** Warm White

**Color Temperatures:** 2700K

**Operating Voltage:** 8-24v

**CRI:** Ra>80

**LED Chip Qty:** 18 Pieces

**Halogen Equivalent:** 20w

**Rated Hours:** 50,000 hrs

**Ambient Operating Temperature:** <72°C

**Transformer Compatibility:** Must be powered by magnetic transformer

**Warranty:** Five year limited warranty on LED components

#### Lamp Color Options

Model #	Color	Color Temp.	Base Type	Wattage	Lumen Output
LBIPINLED-3W-3K	Bright White	3000K	BIPIN/G4	3w	150lm
LBIPIN-LED-3W-AMBER*	Amber	Amber	BIPIN/G4	3w	150lm

\*Turtle Safe

Notes: